


Power Meter Series 700

Functions and characteristics

Transparent
Ready

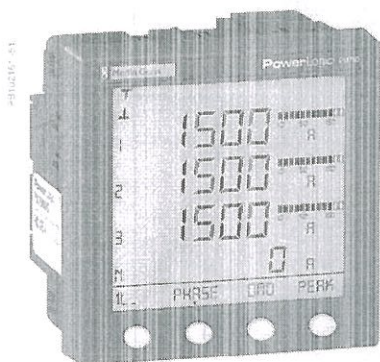

The PowerLogic Power Meter Series 700 offers all the measurement capabilities required to monitor an electrical installation in a single 96 x 96 mm unit extending only 50 mm behind the mounting surface.

With its large display, you can monitor all three phases and neutral at the same time. The anti-glare display features large 11 mm high characters and powerful backlighting for easy reading even in extreme lighting conditions and viewing angles.

The Power Meter Series 700 is available in four versions:

- PM700, basic metering with THD and min/max readings
- PM700P, same functions as the PM700, plus two solid-state pulse outputs for energy metering
- PM710, same functions as the PM700, plus one RS 485 port for Modbus communication
- PM750, same functions as the PM710, plus two digital inputs, one digital output, alarms and signed power factor.

Applications

Panel instrumentation.
Sub-billing and cost allocation.
Remote monitoring of an electrical installation.
Harmonic monitoring (THD).
Alarming with under/over conditions and I/O status (PM750)

Characteristics

Requires only 50 mm behind mounting surface

The Power Meter Series 700 can be mounted on switchboard doors to maximise free space for electrical devices.

Large back lit display with integrated bar charts

Displays 4 measurements at a time for fast readings.

Intuitive use

Easy navigation using context-sensitive menus.

Power and current demand, THD and min/max reading in basic version

A high-performance solution for trouble-free monitoring of your electrical installation.

Active energy class IEC 62053-22 class 0.5S (PM750) and IEC 62053-21 class 1 (PM700, PM700P, PM710)

Suitable for sub-billing and cost-allocation applications.

Innovative Power Meter

RS 485 communications, alarming and digital I/O in a single Power Meter (PM750).

Part numbers


Power Meter

Merlin Gerin brand

PM700 Power Meter	PM700MG
PM700P Power Meter	PM700PMG
PM710 Power Meter	PM710MG
PM750 Power Meter	PM750MG

PowerLogic® PM710/PM750


Power and energy meters

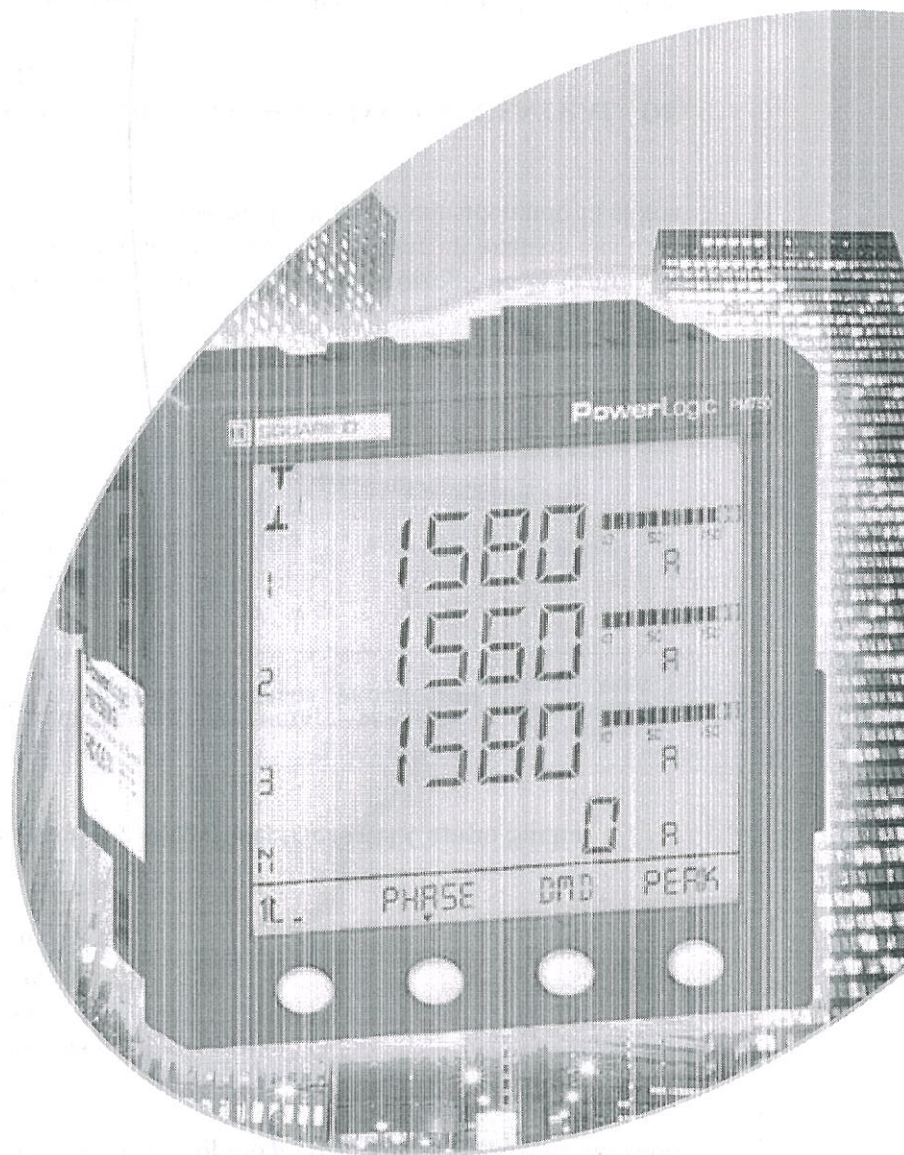

a brand of
Schneider
Electric



SQUARE D

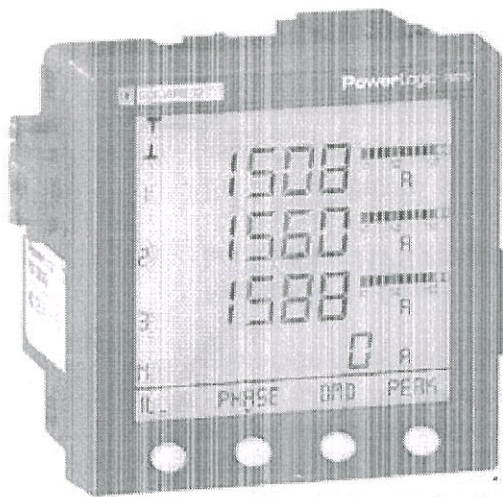

PowerLogic® PM700 series

The PM700 series meter offers outstanding quality, versatility, and functionality in a cost-effective, ultra-compact unit. The meter is simple to use and offers a large, bright LCD display for superior readability even in extreme lighting conditions and viewing angles. An ideal replacement for analog meters, PM700 series meters can be used for stand-alone metering in custom panels, switchboards, switchgear, gensets, motor control centers, and UPS systems.

Complete with power, demand, energy, power factor, and frequency measurements, PM700 series meters are available in a variety of flexible configurations and have IEC62053-21 Class-1 and IEC62053-22 Class 0.5S (PM750 only) certification for basic sub-billing or cost allocation. The PM700 series meters are available in the following two versions:

- PM710: basic plus one RS 485 port (Modbus)
- PM750: basic plus an RS 485, two digital inputs, one digital output, and 15 user configurable alarms

Applications summary

Cost-effective metering

Easily mounted without tools (just two clips) and with a mounting depth of only 50mm, these cost effective and highly accurate power meters are ideal for OEMs and panel builders. The meters support direct connection up to 480 V AC Ph-Ph and seamlessly integrate with PowerLogic® energy management systems. Their high-accuracy power, energy, and demand measurements can be used for bill verification, monitoring backup power for critical systems, and cost effective energy management solutions.

Remote monitoring and control

Get early warning of impending problems that could lead to equipment malfunctions or downtime. Diagnose and isolate the cause of power-related equipment or process problems. The PM750 features 15 user-configurable alarms for the most prevalent over and under conditions common in most power systems. Combine any of the PM750's I/Os with these alarms and communicate through its 2-wire RS-485 port for remote monitoring and control capabilities for greater control over the performance and overall health of your systems. Perfect for demand control applications.

Sub-billing and cost allocation

Perfect for monitoring right down to the tool level, the PM700 series meters can help monitor cost centers, identify opportunities for demand control, and check energy consumption patterns.

Features summary

Cost-effective

- Simple retrofit
- Low initial investment

Ease of use

- Fast setup via display or software
- Compatible with entry-level PowerView® software
- Bright, easy to read LCD display

High accuracy metering

- PM710: Real Energy IEC 62053-21
ANSI C12.16, 1.0 Accuracy Class
- PM750 - Real Energy IEC 62053-22
ANSI C12.20, 0.5 Accuracy Class

Communications

- RS-485 port (PM710, PM750)
- Modbus® protocol for integration with energy management systems

Energy management systems

- Modbus compatible, ready to use with PowerLogic® PowerView® and System Manager Software, Tenant Metering Software (TMS) and PowerLogic® ION® Enterprise Software

Pulse outputs

- 1 output (PM750) for kWh-pulsing, alarm status, or external controlled output

Pulse inputs

- 2 inputs (PM750) for status, alarms or demand input synchronization

Patented technology

- An architecture that uniquely addresses monitoring and control applications
- Adapts to changing needs, avoiding obsolescence

Measurements

Metering

- Real time true RMS electrical parameters up to the 15th harmonic
- 32 samples per cycle
- Measurement accuracy per internationally recognized standards
- Energy and demand measurements
- Per phase voltage, current, peak current demand, watts, VARs, kWh, and more
- Neutral current, THD, frequency, power factor, and more

Meter unit

Physical configuration

- Ideal for low voltage switchboards, shallow cable compartments, standalone machines, and a wide range of commercial and industrial applications
- Mount on switchboard doors to maximize free space for electrical devices
- No tools required; mount meter with clips

Front panel display

Bright LCD back lit display with easy to read digits:

- Intuitive display operation and context-based menus
- Easy setup for common configuration parameters
- Password protection on setup parameters
- Password protection for demand reset

Pulse outputs (PM750)

- kWh with PM750

Pulse input (PM750)

- Trigger alarms or monitor I/O status applications via two digital inputs

Notifications and alarms (PM750)

- Control processes, avoid penalties and perform proactive maintenance using alarms

Communications

- RS-485 port with standard Modbus RTU
- Baud rates from 9,600 bps to 19,200 bps

Flexible power supplies

- 100 to 415 $\pm 10\%$ V AC, 5 VA
- 125 to 250 $\pm 20\%$ V DC, 3 W

Specifications

Accuracy

- Current: PM710 - 0.5% from 1A to 6A
PM750 - 0.4% from 1A to 6A
- Voltage: PM710 - 0.5% (50V to 277V)
PM750 - 0.3% (50V to 277V)
- Power Factor: 0.5% from 1A to 6A
- Power: PM710 - 1%
PM750 - 0.5%
- Frequency: $\pm 0.02\%$ from 45 to 65 Hz
- Real Energy:
PM710
Class 1 as defined by IEC 62053-21
ANSI C12.16, 1.0 Accuracy Class
PM750
Class 0.5S as defined by IEC 62053-22
ANSI C12.20, 0.5 Accuracy Class
- Reactive Energy: Class 2 as defined by IEC 62053-23

Environmental conditions

- Operating temp: -5° C to 60° C (41° F to 140° F) (meter)
-10° C to 50° C (50° F to 122° F) (display)
- Storage temp (meter and display): -40° C to 85° C (104° F to 185° F)
- Humidity rating: 5% to 95% RH at 50° C (122° F) (non-condensing)
- Altitude: 3000m (9843 ft.) maximum

Input-voltage characteristics

- Measured voltage:
 - » 10 to 480 V AC (direct Ph-Ph)
 - » 10 to 277 V AC (direct Ph-N)
 - » up to 1.6 MV AC (with external VT), start of measuring voltage depends on PT ratio
- Metering over-range: 1.2 Un
- Impedance: 2 M Ω (Ph-Ph) / 1 M Ω (Ph-N)
- Frequency range: 45 to 65 Hz

Input-current characteristics

- CT ratings:
 - » Primary: adjustable from 5 A to 32767 A
 - » Secondary: 5 A or 1 A
- Measurement input range: 5 mA to 6 A
- Permissible overload:
 - » 10 A continuous
 - » 50 A for 10 seconds per hour
 - » 120 A for 1 second per hour
- Impedance: $< 0.1 \Omega$
- Load: $< 0.15 \text{ VA}$

Mechanical characteristics

- Dimensions:
 - 96 x 96 x 69 mm (3.78" x 2.72") (meter with display)
 - 96 x 96 x 50 mm (3.78" x 2.72") (behind mounting surface)
- Weight: 0.37 kg (0.8 lb)

Selection Guide		PM710	PM750
General			
Use on LV and HV systems		■	■
Current accuracy (1A to 6A)		0.5 %	0.4 %
Voltage accuracy (50V to 277V)		0.5 %	0.3 %
Energy and power accuracy		1.0 %	0.5 %
Instantaneous rms values			
Current	Phases and neutral	■	■
Voltage	Ph-Ph, Ph-N	■	■
Frequency		■	■
Power			
Real		■	signed
Reactive		■	signed
Apparent		■	■
Power factor	Total	■	signed ²
Energy values			
Active, reactive, apparent energy		■	signed ²
Demand values			
Current (present and max.)		■	■
Active, reactive, apparent power		■	■
Setting of calculation mode		■	■
Power quality measurements			
Harmonic distortion (current, voltage)		■	■
Data recording			
Min/max of instantaneous values		■	■
Display and I/O			
Backlit LCD display		■	■
Pulse output		-	1
Pulse input		-	2
Communication			
RS 485 port		■	■
Modbus [®] protocol		■	■
Alarms		-	■

¹ Total and per phase

² Real and reactive power and energy are signed net consumptions (PM750)

Software integration

PowerLogic[®] PowerView[™] Software
 PowerLogic[®] System Manager Software
 PowerLogic[®] Tenant Metering Software (TMS)
 PowerLogic[®] ION[®] Enterprise Software

PowerLogic[®] and ION[®] software systems

Power Measurement and its ION products were recently acquired by Schneider Electric and integrated within our PowerLogic range of software and hardware, creating the world's largest line of power and energy management solutions.

Schneider Electric - North America
 295 Tech Park Drive
 LeVergne, TN 37036
 PH: 866-466-7627
 PowerLogic.com

As standards, specifications and designs develop from time, always ask for confirmation of the information given in this publication. PowerLogic[®], ION[®], ION Enterprise, PowerView[™], MeterM@N and Modbus[®] are either trademarks or registered trademarks of Schneider Electric or its affiliates. Other marks used herein may be the property of their respective owners.

